




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B32B 3/02		A1	(11) International Publication Number: WO 96/31342
			(43) International Publication Date: 10 October 1996 (10.10.96)
(21) International Application Number: PCT/US96/04668 (22) International Filing Date: 4 April 1996 (04.04.96) (30) Priority Data: 08/418,421 6 April 1995 (06.04.95) US (71) Applicant: STOWE WOODWARD LICENSCO INC. [US/US]; Suite 1300, 1105 North Market Street, Wilmington, DE 19801 (US). (72) Inventors: PAASONEN, Jan, Anders; Auratie 2 A 15, FIN-04220 Kerava (FI). YLISELA, Seppo, Antti; Kantokuja 1, FIN-04440 Jarvenpaa (FI). (74) Agent: LORUSSO, Anthony, M.; Lorusso & Loud, 440 Commercial Street, Boston, MA 02109 (US).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. With amended claims.	

(54) Title: A COVERED ROLL AND A METHOD FOR MAKING THE SAME

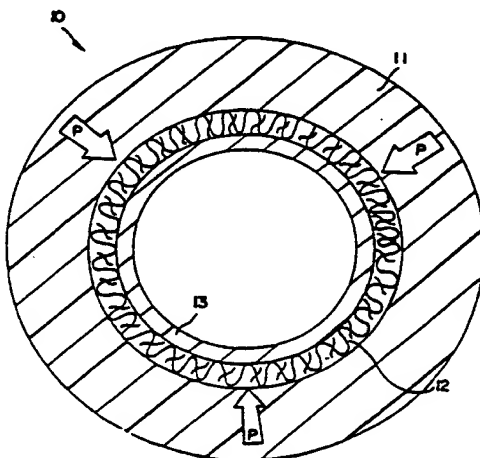

(57) Abstract

Covered rolls (10) having reduced residual stresses through the inclusion of one or more intermediate compressive layers (12) and methods for manufacturing are disclosed. In one embodiment, the intermediate compressive layer (12) comprises a three-dimensional fabric that is filled preferably with a thermoset resin system which cures at lower temperature than the cover. In a second embodiment, the precise amount of shrinkage in the roll (10) is predetermined to a high enough degree of accuracy so that a depth for the fabric layer can be used to compensate for the amount of shrinkage, thereby eliminating the need for filling. In a third embodiment, the compressive layer (12) is comprised of a meltable material wherein said material melts at cure temperatures. The resulting cavity is then filled with a thermoset resin. The problems caused by chemical and thermal shrinkage are further reduced through a method based on applying a polymeric cover layer (11) over one or more intermediate compressive layers (12), curing at an elevated temperature, and allowing the cover (11) to shrink during curing or hardening.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B32B 3/02	A1	(11) International Publication Number: WO 96/31342 (43) International Publication Date: 10 October 1996 (10.10.96)
(21) International Application Number: PCT/US96/04668 (22) International Filing Date: 4 April 1996 (04.04.96) (30) Priority Data: 08/418,421 6 April 1995 (06.04.95) US (71) Applicant: STOWE WOODWARD LICENSCO INC. [US/US]; Suite 1300, 1105 North Market Street, Wilmington, DE 19801 (US). (72) Inventors: PAASONEN, Jan, Anders; Auratie 2 A 15, FIN-04220 Kerava (FI). YLISELA, Seppo, Antti; Kantokuja 1, FIN-04440 Jarvenpaa (FI). (74) Agent: LORUSSO, Anthony, M.; Lorusso & Loud, 440 Commercial Street, Boston, MA 02109 (US).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>With amended claims.</i>

(54) Title: A COVERED ROLL AND A METHOD FOR MAKING THE SAME

(57) Abstract

Covered rolls (10) having reduced residual stresses through the inclusion of one or more intermediate compressive layers (12) and the method for manufacturing are disclosed. In one embodiment, the intermediate compressive layer (12) comprises a three-dimensional fabric that is filled preferably with a thermoset resin system which cures at lower temperature than the cover. In a second embodiment, the precise amount of shrinkage in the roll (10) is predetermined to a high enough degree of accuracy so that a depth for the fabric layer can be used to compensate for the amount of shrinkage, thereby eliminating the need for filling. In a third embodiment, the compressive layer (12) is comprised of a meltable material wherein said material melts at cure temperatures. The resulting cavity is then filled with a thermoset resin. The problems caused by chemical and thermal shrinkage are further reduced through a method based on applying a polymeric cover layer (11) over one or more intermediate compressive layers (12), curing at an elevated temperature, and, allowing the cover (11) to shrink during curing or hardening.

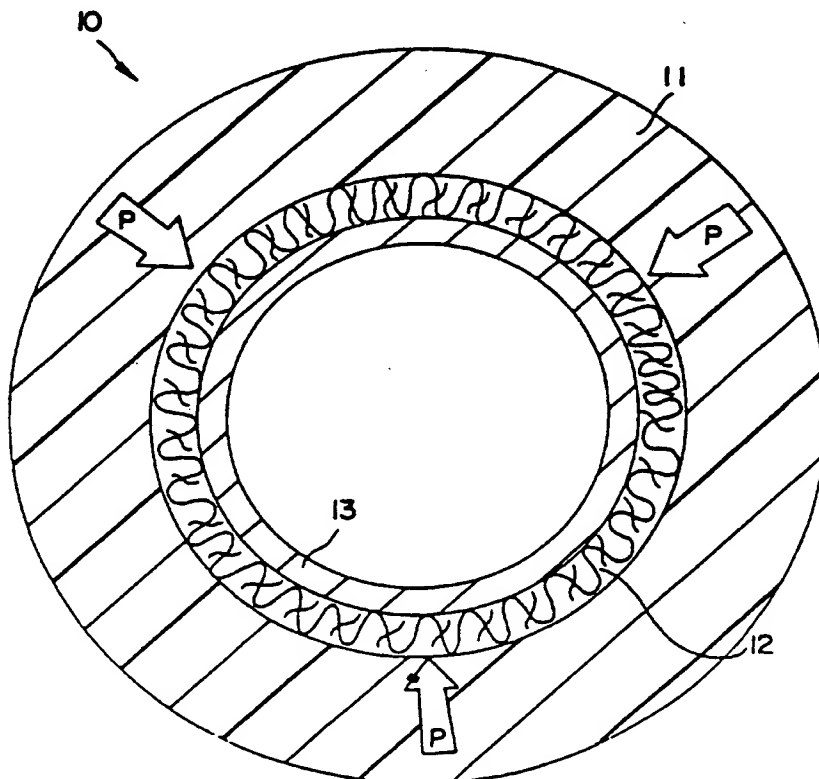

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

A COVERED ROLL AND A METHOD FOR MAKING THE SAME

FIELD OF INVENTION

The field of this invention is covered rolls for industrial applications, and more particularly, rolls with relatively hard covers and methods of making such rolls.

BACKGROUND OF THE INVENTION

Covered rolls are used industrially in demanding environments where they are subjected to high dynamic loads and temperatures. For example, in a typical paper mill, large numbers of rolls are used not only for transporting the web sheet which becomes paper, but also for processing the web itself into finished paper. These rolls are precision elements of the system which are precisely balanced with surfaces that must be maintained at specific configurations.

One type of roll that is particularly subjected to high dynamic loads, is a calender roll. Calendering is employed to improve the smoothness, gloss, printability and thickness of the paper. The calendering section of a paper machine, is a section where the rolls themselves contribute to the manufacturing or processing of the paper rather than merely transporting the web through the machine.

In order to function properly, calender rolls must have extremely hard surfaces. For example, typically, the calender rolls are covered with a thermoset resin having a Shore D hardness within the range of 84-95 and an elastic modulus within the range of 1,000-10,000 MPa. Most commonly, epoxy resins are used to cover calender rolls because epoxy resins form extremely

hard surfaces. Thermoset resins, such as, epoxy resins with characteristics suitable for forming the surfaces of calender rolls are cured at relatively high temperatures. Currently, such resins are cured at temperatures in the range of 100-150C°.

5 It is well known that the higher the curing temperature for heat resistant thermoset resin systems, the higher will be the thermal resistance of the resulting cover. Furthermore, present day demands of the paper mill require rolls, particularly calender rolls, with higher thermal resistances. Thus, it would
10 be desirable to produce covers for such rolls which can be cured at 150-200°C. However, prior to the present invention, curing at such high temperatures caused so much stress that the cover tended to crack, rendering it unusable. A discussion of the physical chemistry of such a roll cover can be found in a paper
15 entitled, "The Role Of Composite Roll Covers In Soft And Super Calendering," J.A. Paasonen, presented at the 46ème Congres Annuel Atip, Grenoble Atria World Trade Center Europole, October 20-22, 1993, the teachings of which are incorporated herein by reference.

20 Indeed, one important challenge to the manufacture of roll covers is to develop roll covers that can withstand the high residual stresses caused during manufacturing. Problems from residual stresses are most significant in the harder (higher stiffness) compounds and often result in cracking, delamination,
25 and edge lifting.

Residual stresses not only promote the undesirable cracking and/or edge lifting tendency of the cover, but they often cause

premature local failure or shorter than desired life cycles. This is especially true for high performance, hard polymeric roll coverings where the basic approach has been to tolerate a production level of residual stresses that is still acceptable from a products performance standpoint. Therefore, there is a need to develop methods of roll cover construction that reduce residual stresses in the product.

Consideration of residual stresses is especially critical during the manufacture of the roll cover. In particular, heating and curing processes must be given careful consideration as these conditions are the most significant factors in the development of such stresses. Residual stresses develop in polymer based covers as a result of the mismatch in thermal shrinkage properties between and/or among the cover materials and the core materials and from chemical shrinkage. Polymers, the material of the cover, typically have a coefficient of thermal expansion that is an order of magnitude greater than that of steel, the material of the core.

A suggestion to alleviate stresses caused by processing covered rolls is to produce a cover as a finished product and bond the fully cured cover to a core structure. This can be accomplished by wrapping a cover (topstock) over a mold, demolding and bonding the cover to a core structure at a lower temperature level than the cover cure temperature, or by casting the cover separately and bonding it to a metal core at a lower temperature than the casting temperature. Thus, the thermal stresses that would arise between the cover and the core from

cooling down the cover from the cure temperature would be reduced. Although, adhesives are available, some adhesives exhibit poor bonding strengths when the roll is subjected to industrial applications. In general, adhesives that cure at high
5 temperatures are required for high temperature performance. However, subjecting the core to high temperature bonding conditions results in those stresses that were avoided by separately producing the cover.

In addition, manufacturing costs would be raised by the
10 necessity of having to produce the cover first as a separate cylindrical structure, and then, fitting it over a roll core at a lower processing temperature than was required for processing the cover. These casting methods require that an open cavity be created between the cover and the roll core which necessitate
15 multiple process steps and the use of inner mandrels. Even if the cover is separately manufactured via a centrifugal casting method, additional costs and steps are required for an outer mold.

Another possible solution is to develop a cover material
20 having a thermal shrinkage as close to the metallic core as possible. While composite structures may be developed with the expansion coefficients tailored to match the metal core, such methods are expensive and may not produce the desired thermomechanical response for certain industrial applications. Thus,
25 the need exists to develop methods to reduce the residual stress levels in current production materials.

SUMMARY OF THE INVENTION

The problems caused by chemical and thermal shrinkage of hard roll covers are reduced in accordance with the present invention by the inclusion of at least one intermediate compressive layer between the roll core base and the outer cover, or topstock. This compressive layer is rigid enough to allow the cover to be applied to the roll while being compressible enough to deform and absorb the stresses which occur as the cover is shrinking during processing.

The problems caused by chemical and thermal shrinkage are further reduced in accordance with the present invention through a method, which is based on applying a polymeric cover layer over an intermediate compressive layer, curing at an elevated temperature, and, allowing the cover to shrink during curing or hardening. In one embodiment of the present invention, the compressive layer is filled with a filler material after the cover is fully processed.

Accordingly, it is an object of the present invention to provide a roll with a very hard polymeric cover over a metal roll core.

It is a further object of this invention to provide coverings for industrial rolls which have a high degree of flexibility and high resistance to deformation causing stresses.

Another object of this invention is to provide rolls with hard polymeric coverings for industrial applications that are less expensive to manufacture than existing rolls.

Another object of this invention is to provide coverings

for industrial rolls that reduce the transfer of frictional heat from one layer to the next.

Another object of this invention is to provide coverings for industrial rolls that have an extended service life.

5 Another object of this invention is to provide coverings for industrial rolls that minimize or eliminate rotational slip-page between the cover and the roll.

10 Another object of this invention is to reduce the problems caused by chemical and thermal shrinkage that occur during the manufacture of a covered roll.

Another object of this invention is to reduce the problems caused by residual stresses that occur during the manufacture of the covered roll.

15 Another object of this invention is to provide an intermediate compressive layer between the metal roll and the outer cover, or topstock, to absorb the stress made by the cover on the metal roll.

20 It is another object of this invention to provide an intermediate compressive layer that is rigid enough to allow the cover to be applied to the roll while being compressible enough to absorb the stresses which occur as the cover is shrinking during processing.

25 It is another object of this invention to fill the compressive layer with a filling material after the cover has been fully processed.

It is another object of this invention to provide a covered roll having a multilayered structure of polymers or polymer

composites, wherein one or more of the intermediate layers comprises a compressive layer.

Another of object of this invention is to provide an improved covered calender roll and method for making such a roll.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a cross sectional view of a prior art roll having a multi-layered covering and which diagrammatically shows the thermal and residual stresses within the cover directed towards the metal roll core;

FIG. 2 is a cross-sectional view of the covered roll of the present invention having an intermediate compressive layer and which diagrammatically shows how the thermal and residual stresses within the cover are absorbed by an intermediate compressive layer;

FIG. 3 is a cross-sectional view of the covered roll of the present invention having an intermediate compressive layer applied over a roll core having a base layer, and which diagrammatically shows how the thermal and residual stresses within the cover are absorbed by an intermediate compressive layer;

FIG. 4 is a perspective view of the manufacturing process in accordance with the present invention in which a top coat is applied as a layered resin impregnated fabric;

FIG. 5 is a sectional view of the manufacturing process in accordance with the present invention in which a top coat is cast in a metal outer mold assembly;

FIG. 6 is an exploded perspective view of a metal roll core base and an extender assembly used to assist in the manufacturing of rolls in accordance with the present invention;

FIG. 7 is a perspective view of an extender assembly as it is fitted flush with the surface of a metal roll core base in

accordance with the present invention;

FIG. 8 is a sectional view taken along line 8-8 of FIG. 7 of the covered roll of the present invention further showing the bottom drill sites as they are located within the region defined by the surface of the covered extender assembly;

FIG. 9 is a partially sectioned view of an elevated roll manufactured in accordance with the present invention;

FIG. 10 is a side view of a three dimensional compressive spacer fabric that may be employed in producing the present invention;

FIG. 11 is a perspective view of a sheet having a plurality of projections which define a plane in space; and,

FIG. 12 is a quarter section of a finished covered roll manufactured in accordance with the present invention which shows a covered roll having a top coat with a beveled edge and an intermediate spacer fabric layer filled with a resin.

DESCRIPTION OF THE PREFERRED EMBODIMENT

At the outset, the covered roll and process for making the covered roll are described in their broadest overall aspects with a more detailed description following. High performance covered rolls are manufactured with reduced residual stresses through a method of applying a polymeric cover layer over an intermediate compressive layer. The purpose of the intermediate compressive layer is to absorb the thermal shocks and chemical volume changes created during the manufacturing process.

With reference now to the drawing, FIG. 1 shows a covered roll 1 of the prior art. The arrows identified by the letter P in FIG. 1 indicate how the residual stresses and thermal shocks within the cover 2 are directed towards the metal roll core base 3. Although not indicated by arrows in FIG. 1, the residual stresses and thermal shrinkages occur in other directions within the roll as well, such as, axially and radially. Eventually, these internal stresses lead to premature cracking of the roll.

FIG. 2 shows an embodiment of the present invention wherein a covered roll 10 has a roll cover 11 applied over an intermediate compressive layer 12 and a metal core base 13. The arrows identified by the letter P in FIG. 2 indicate how the intermediate compressive layer 12 allows the topstock or roll cover 11 to shrink in the direction as shown during the hardening and cooling after thermal treatment of this layer. Although not indicated by arrows in FIG. 2, intermediate compressive layer 12 allows for shrinkage and shock absorption in other directions within the roll as well, such as, axially and radially.

As will be apparent to one skilled in the art, the compressive layer can be applied to a variety of roll bases in addition to a metal roll core base. Specifically the roll core 13 may have formed around it, a resinous base layer 14 as shown in FIG 3. Further, it will be readily understood that the metal roll core 13 depicted in FIG. 2 may be replaced by other suitable roll bases, such as, polymeric roll bases or other composite roll bases. However, when the roll base is a metal core, typically it is a conventional metal roll core made of iron or steel.

In one embodiment of the present invention involving a secondary processing phase, the intermediate compressive layer 12 comprises a three dimensional spacer fabric that, in the final stages after topcoat production, is filled preferably with a thermoset resin forming system, which cures at a lower temperature than the cover 11.

However, the intermediate compressive layer 12 does not have to be filled. In one important embodiment, the precise amount of shrinkage in the roll can be predetermined with enough accuracy, so that, a depth for the intermediate fabric layer can be used to compensate for the amount of this shrinkage, and therefore, eliminate the need for filling.

In yet another important embodiment of the present invention, the intermediate compressive layer is comprised of a wax or other meltable material. Indeed, the wax or other meltable material can be applied to core 13 in the same manner as a resin, i.e., through a nozzle. After a cover or topstock is applied

over the wax, the wax can be removed by melting, and the resulting gap-layer filled utilizing conventional pressure casting methods.

5 In manufacturing a roll in accordance with the one important embodiment and with further reference to FIG. 2, a compressive layer 12 is applied to a metallic roll 13. Thereafter, a covering material 11 is placed over the compressive layer, and the covering material is fully cured. During the curing process, the residual stresses are absorbed by the compressive
10 layer 12 and do not result in the roll cracking. After the top coat 11 has been allowed to cure, the compressive layer 12 is filled with a polymer that cures at a lower temperature than the cover or top coat 11, thus providing strength to the roll 10 and reducing the likelihood of roll cover 11 cracking.

15 In the embodiments of the present invention employing a three dimensional spacer fabric as an intermediate compressive layer, the fabric is laid over a suitable roll base with an adhesive cement. After curing, the surface of the spacer fabric layer is covered with a resin and baked to form an intermediate
20 compressive layer. Following the curing of this resin coated surface surrounding the intermediate compressive layer, the cover layer is applied. FIG. 4 illustrates, generally, how the cover can be applied from a roll of resin impregnated textile on to the rotating roll. Another way of covering the roll is to cast the
25 cover as shown in FIG. 5. wherein a metal mold 20 is fitted over the roll after applying the intermediate layer 12. Then, the cover is cured allowing the resulting chemical and temperature

changes to shrink the cover over the three dimensional spacer fabric layer. To facilitate the filling of the compressive layer, FIG. 6 shows how an extender cap assembly 20 is placed on each end of the metal roll core base. The extender cap assembly
5 comprises a substantially circular plate 21 and a cylindrical section 22. Preferably, the plate 21 is made out of wood and the cylindrical section is made of the same material as the roll core base 23. However, other suitable extender cap assemblies can be made entirely out of wood or other similar materials, and may
10 include other configurations, such as, annular rings, annular rings with a bolt-on top plate or other cap shapes, including shoulder plates integral with the ring, and equivalents thereof.

FIG. 7 is a perspective and cut-away view of the extender cap assembly 20 in place on one end of the metal roll core base
15 23 prior to the application of any layers, and shows how the outer circumference of the cylindrical section 22 matches the circumference of the metal roll core base 23.

After the cover 11 is applied and cured, drill holes can be made in the region of the extender caps. FIG. 8, shows a
20 sectional view of the covered roll 30 of the present invention prior to the injection of filling material into the intermediate compressive layer 32. The drill holes 33 and 34 extend through the top coat 31 and into the intermediate compressive layer material 32, and are to be used as a conduit for filling the
25 intermediate layer 32. Phantom lines 49 in FIG. 8 and FIG. 9, further show how the drill holes are located within the region of the covered extender cap assembly comprising the annular ring

36 and cylindrical section 35. As a final step of the process, the now compressed intermediate layer is filled with a system for forming a thermoset polymer. FIG. 9 shows how this is accomplished by lifting the roll on its bottom end so that it
5 tilts or sits at an angle in the range of about 5-90° with respect to the horizontal. Then, the thermoset resin forming system can be pumped under pressure into the intermediate compressive layer until the resin flows out of the top taps or spigots. With reference to FIG. 8, this is accomplished by
10 placing gaskets 38 and 39 over each end of the roll. Preferably, the gasket is made out of wood similar to plate 21 described herein. The thermoset resin forming system is pumped into through hole 34 until the thermoset resin forming system extrudes out of valve 40 located at through hole 33. Then, the
15 valve 40 is closed and the thermoset resin forming system continues to be pumped into through hole 34 until it extrudes out of valve 41 located at the top of the roll. At this point, the intermediate compressive layer is completely filled. All that remains to complete the roll is the cutting of the extender
20 portions of the roll.

After injecting the filling material into the intermediate compressive layer 31 and curing the filler material, the covered extender cap assembly can be removed from the remainder of the roll, for example, by cutting towards the metal roll core base
25 37 in the vicinity of phantom lines 49 indicated in FIG. 8. Thus, the finished product is a covered roll absent any drill holes. Manufacturing a covered roll with the aforementioned

extender cap assemblies also serves the purpose of ensuring that the intermediate layer of the finished roll is completely filled with material.

FIG. 10 shows how the compressive layer may be, for example, a three dimensional spacer fabric layer 50 having structurally supporting fibers 51 interwoven between a top fibrous layer 52 and bottom fibrous layer 53. Examples of other suitable three dimensional fabrics are described in United States Patent 5,052,448 issued to W. Givens the teachings and disclosure of which are hereby incorporated by reference.

FIG. 11 shows another example of a suitable intermediate compressive layer is a three dimensional sheet having a single surface and a plurality of projections, wherein the projections extend from the surface to define a substantially planar boundary. As will be apparent to one skilled in the art, the sheet may have a variety of projections including semi-conical, conical, hemispherical and the like. Further, the pattern or two dimensional layout of these projections may vary to include substantially checkerboard patterns, triangular patterns and other configurations depending upon the method of roll making.

As will be apparent to one skilled in the art, more than one compressive layer may be used if the roll design so dictates. The compressive layer is preferably formed from a fabric although other materials are suitable. It is readily apparent to one skilled in the art that different kinds of three dimensional spacer materials may be used as a compressive layer including but not limited to: three dimensional spacer textile fabrics; textile

fabrics impregnated with resins; three dimensional sheets made out of fiberglass, polyester, vinylester or epoxy; and, combinations and equivalents thereof. Typically, it is desirable to use a material for the compressive layer that is flexible enough so as to be rolled; resilient enough so as to be compressed; rigid enough to support a cover; and/or, porous enough so that it can be filled with a suitable material.

It should be noted that the compressive layer has a noticeable thickness usually in the order of 2 to 15 millimeters with 4 mm being preferred, and should not be confused with woven or nonwoven sheet materials that may be applied during the manufacturing of covered rolls as one or more layers. It is important that the compressive layer be fillable with a material that will form a composite part of the roll and be compatible with the cover material. As is explained in detail below the filling material is usually a resin system similar to the resin system used to form the cover, but which cures at a lower temperature than the cover. An important aspect of the present invention is that the compressive layer remain unfilled with any resin forming material until after the cover material of the covered roll has been fully cured.

When the compressive layer is formed from a fabric, the fabric is composed of a suitable material, preferably a synthetic material, such as a polyester, DACRON, or other synthetic material, such as NYLON. The preferred fabric is a "Textile Spacing Fabric" that can be purchased from Müller Textil GmbH, Postfach 31 40 D-5276 Wiehl-Drabenderhöhe, Germany, the details

of which are provided in a brochure displaying product number 5556 incorporated herein by reference. Other spacer fabric materials suitable for use include 3D-TEX, by MAYSER GMBH & CO., Lindenberg, Postfach 1362, Germany, and a fiberglass product by
5 PARABEAM Industries, Hoogeindsestraat 49, 5700 AC Helmond, Netherlands.

Rolls in accordance with the present invention can utilize two systems which yield two different polymers upon curing. The polymer forming the cover, is preferably a thermoset resin and
10 can be any polymer normally used in the art, and forms no part of this invention. Most commonly an epoxy resin is used for the topcoat, such as, an epoxy resin based on a Diglycidylether of Bisphenol A, commercially known as DER 331 from Dow Chemical Co. This would be cured in a temperature range from 130-150° with an
15 aromatic amine, such as, Diethylenetoulenediamine (DETDA 80) from Lonza Ag, Switzerland. As another example, the cover can be made from a Cyanate Ester modified Novolac Resin system supplied from Allied Signal Inc., U.S.A.

Preferably, the intermediate layer is filled with a
20 thermoset forming system that cures at a lower temperature than the polymer system used for the topcoat. The intermediate layer can be filled with a resin. Although, the filler material for the intermediate layer is preferably a thermoset resin, a thermoplastic material can be employed. As with the topcoat,
25 the preferred epoxy resin is based on a Diglycidylether of Bisphenol A, commercially known as DER 331 from Dow Chemical Co., but cured in the temperature range of 70-90°C with a

suitable aliphatic amine, such as, Jeffamine T-403 supplied by Texaco Chemical Co., U.S.A.

5 In an exemplary embodiment, the spacer fabric layer is filled with a thermoset polymer under such conditions, in which the development of higher than desired residual stresses in the cover and also in the spacer fabric layer itself, can be prevented. As an additional aid in reducing residual stresses, such thermoset systems may be utilized for the compressive layer, which have properly designed combined thermal and cure shrinking
10 properties. For base systems which require high temperature resistance, tailored thermoset systems may be used in a way that the glass transition temperature in the base can be adjusted to the required level.

15 The invention is further illustrated by the following non-limited example.

Although the present invention is applicable to originally manufactured rolls which have never been covered, (OEM), for use in mills, the present example is directed to a calender roll which has been removed from a paper mill for purposes of being
20 recovered with a hard, polymeric surface. Initially, after the roll is received in the plant, the old covering is removed by placing the roll in the lathe and removing the worn, damaged covering with a cutting tool. In one of many standard procedures for refurbishing such rolls, the cutting tool is allowed to scrap
25 away the prior covering allowing a fraction of a millimeter of the prior covering to remain on the steel roll core. Thereafter, the remaining fraction of a millimeter of covering is removed by

grinding. The roll cores normally are made of steel but commonly they are formed of cast iron and chilled iron.

After the grinding operation the roll core is grit blasted. Grit blasting produces an activated surface on the metal core to optimize bonding with subsequent non-metallic materials that are to be built up on the roll core during the recovering operations.

After a grit blasted activated surface has been achieved, a protective layer, such as a phenolic resin or other suitable protective layer known in the art, is applied to the surface of the roll core to prevent oxidation that would otherwise reduce the optimal bonding of the prepared surface.

The foregoing pretreatment steps are standard and have been used in the roll covering industry for decades and form no part of the present invention.

In this example, prior to the application of the compressive layer, a base layer is applied to the metal roll that has been pre-treated as set forth above. The base layer is applied by a wrapping technique using the method and apparatus shown in FIG. 4. In this embodiment a 100 mm wide fiberglass fabric is wrapped with 50% overlap on to the roll while the roll is rotating. The roll is simultaneously sprayed with a two component epoxy resin system based on a Diglycidylether of Bisphenol A, commercially known as DER 331 from Dow Chemical Co., and is cured with an aromatic amine curing agent, Diethylenetoulenediamine (DETDA 80) from Lonza Ag, Switzerland. The wrapping is continued for eight passes, a single pass extending the length of the roll, so as comprise 8 plies and produce a base layer 3 mm thick. This

layer is then gelled as the roll is subjected to a curing temperature of 50°C from heat lamps for a period of about 5 hours.

5 The next step in the process is to prepare the surface for bonding. This is done by rough grinding the gelled base and then applying an adhesive to the resulting roughened surface. An epoxy based adhesive is applied to the ground surface and then the spacer fabric is applied over that.

10 The preferred spacer fabric is a "Textile Spacing Fabric" that can be purchased from Müller Textil GmbH, Postfach 31 40 D-5276 Wiehl-Drabenderhöhe, Germany, the details of which are provided in a brochure displaying product number 5556 incorporated herein by reference. As shown in FIG. 10, this fabric can be thought of as a sandwich formed from a top and
15 bottom woven surface with a filler weaved in between. This fabric is preferred because it is very compressible under pressure and yet rigid enough to be wrapped in subsequent steps. For this example, a 4 mm thick material is purchased in widths of 1.5 meters so that 4 pieces are needed to cover a 6 meter
20 roll. After the textile spacing fabric has been sewn and secured to the roll base, it is coated with a 1 mm sealing layer whose purpose is to prevent impregnation of subsequent resin material into the hollow cavities of the spacing fabric. To accomplish this, a non-woven tape impregnated with resin is
25 wrapped around the textile spacing fabric while the roll is rotated on a lathe. The non-woven tape that is used is called Reemay and is obtained from Nordlys SA, Z1 de la Blanche, Maison

59270, Bailleul, France. It is a fabric made from fibers of polyester. Prior to being applied to the roll it is run through a dipping trough of epoxy resin. Again, the epoxy resin is based on a Diglycidylether of Bisphenol A, commercially known as DER 331 from Dow Chemical Co., but cured with an aliphatic amine, Jeffamine T-403 supplied by Texaco Chemical Co. The two part components that are necessary to produce the cured resin are fed into the dipping tank which also contains the aliphatic amine curing agent. After the roll has been wrapped in 2 passes with the thermoset resin impregnated non-woven material, the resin in the material is gelled at a temperature of 50°C for 2 hours, but not cured.

At this stage the adhesive film prevents the liquid from the next step from penetrating through it and into the textile spacing fabric while at the same time being compressible enough to allow the shrinking of the next layer to be absorbed by the spacing fabric.

The next step in the procedure is application of the cover material, and in this example, it is applied by the wrapping procedure shown in FIG. 4. In this step, however, another non-woven material formed of Kevlar is utilized. Kevlar, a product of DuPont, is obtained from Technical Fibre Products, Limited, Burnesside Mills, Kendall, Cumbria LA9 6PZ England. The non-woven fabric used has a specification of 25 g/m². Here, again, the epoxy resin is based on a Diglycidylether of Bisphenol A, and is the same epoxy used to form the protective gel coat but with the aromatic amine curing agent used to form the base layer,

Diethylenetoulenediamine (DETDA 80) from Lonza Ag, Switzerland.

The cover material is wrapped in this manner. Using 100 mm wide strips, the wrapping process is extruded for 20 passes in a 50:50 overlap to achieve a specified thickness which in this case is 7 mm. The next step in the process is to gel the top layer so that it is non-flowing. This is done by heating the roll under infrared lamps while the roll rotates for 15 hours at 70C°. After it is gelled the ends of the coating are cut to provide an even coating, (trimmed). The trimming is done right down to the metal core. This is done with a cutting tool. The entire roll is then delivered to an oven. It is cured under the following curing cycle: 8 hours at 80C°, followed by 8 hours at 90C°, followed by 8 hours at 100C°, and finally, followed by 16 hours at 110C°. The roll is then delivered to another oven for its cool down cycle. It is allowed to cool for 10 hours. The roll is then taken to the production floor where the surface is prepared, normally by grinding it to a nearly smooth, but unfinished surface.

The roll is then taken to the production floor where the surface is prepared, normally by grinding it to a nearly smooth, but unfinished surface. Prior to finishing the surface of the cover layer, the roll is prepared for the filling of the intermediate compressive layer by drilling holes through the cover into the interior of the textile spacing fabric. Preferably, this is accomplished by drilling 3 holes into the ends of the roll at the locations shown in FIG. 9, (base and sealing layers not shown). The resin is inserted into the cavity

of the intermediate spacer fabric layer through the bottom hole 34 until it squirts out the bottom hole 33 on the opposite side through valve 40. When this occurs, valve 40 is closed and the cavity is filled with resin until it flows out of valve 41. Again, it is the same resin system that is used for sealing the top layer for the spacing fabric, i.e., Bisphenol A epoxy resin with an aliphatic amine curing agent. Prior to the insertion of the resin, the entire roll assembly is preheated in an oven to a temperature of 75°C. The entire roll is then cured in an oven at 75°C for 24 hours.

During the entire processing of this roll an extender 35 can has been placed over both ends of the roll. Each extender can has an annular ring 36 that slips over the axial of the roll mating and extending the metal cylindrical surface outward along its longitudinal axis. Cylindrical cans are placed on both ends of the axle. Ideally this is done by having a wooden donut 36 where the donut fits over the axle of the roll and then this provides the edge of the can which extends the roll covering surface. It is important to note that the roll core metal base 37 and the extender cans 35 are treated with the covering processes herein described. Thus, the roll core metal base and its extender cans are covered with the base layer, the intermediate spacer fabric layer, the sealing layer and the cover at the end of the process. The use of the extender cans creates an additional void to be filled during the step of filling the intermediate layer, thus guaranteeing the complete filling of the intermediate layer. Furthermore, since the holes are drilled

in the region of the extender cans, the covering can be cut interior to the boundary of the holes thereby presenting a finished product.

5 The next part of this example is to cut through the various layers to the actual metal roll followed by the removal of the two end pieces. The cutting is done interior to the location of the holes to produce a roll with a finished covering. As final steps in the process, the cover is finish ground and the edges can be treated to form a slight bevel which is currently known
10 in the art. In accordance with the above example, FIG. 12 shows a covered roll 1 having a top coat 2 with a beveled edge and a filled intermediate spacer fabric layer 4, (base and sealing layers not shown). All of the layers have been cut down to the metal roll core 5. The extender can assembly, (not shown), has
15 been removed.

Using the method of the foregoing specific example, high performance covered rolls can be produced in a range of cover, intermediate layer and base layer thicknesses. Specifically, the base layer and its associated manufacturing steps can be omitted
20 entirely by cementing the intermediate spacer fabric directly to a metal roll core base. However, when a polymeric base is employed, it can range in thickness to about 8 mm. The intermediate layer and its sealer layer can also vary in depth in the range of about 2-15 mm. Similarly, the cover thickness can
25 vary in a range of about 4-20 mm. Although these parameters may vary as indicated, the above described procedures for making a specific roll remain substantially unchanged.

In the foregoing specification, the invention has been described with reference to specific exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made thereunto without departing from the spirit and scope of the invention as set forth in the appended
5 claims. The drawing and specification are, accordingly, to be regarded in an illustrative rather than in a restrictive sense.

CLAIMS:

1. A covered roll comprising:

a roll core base;

5 a compressive layer having a top surface and a bottom surface and a void space therebetween, said compressive layer circumferentially surrounding said roll core base;

a cover circumferentially surrounding said compressive layer;

10 said compressive layer being rigid enough to support said surrounding cover and compressible enough to change in volume in response to the volume changes which occur in said cover as a result of the stresses created during processing.

15 2. The covered roll of claim 1, wherein said cover comprises an epoxy resin having a Shore-D hardness greater than 84.

3. The covered roll of claim 2, wherein said cover is an epoxy resin which is cured at a temperature greater than 100°C.

20 4. The covered roll of claim 1, wherein said cover is formed of a material which is cured at a temperature greater than 100°C.

5. The covered roll of claim 4, wherein said cover is an epoxy
25 resin which is cured at a temperature greater than 100°C.

6. The covered roll of claim 2, wherein the void space of said

compressive layer is filled with an epoxy resin cured at a temperature lower than temperature at which the cover is cured.

7. The covered roll of claim 1, wherein said compressive layer
5 comprises a fabric having a fibrous top surface and a fibrous bottom surface, said top and bottom surfaces being structurally supported by fibers extending from said top surface to said bottom surface.

10 8. The covered roll of claim 1, wherein said compressive layer comprises a sheet having a single surface and a plurality of projections, said projections extending from said surface to define a substantially planar boundary.

15 9. The covered roll of claim 1, wherein the roll core base comprises a metal roll core.

10. The covered roll of claim 3, wherein the roll core base comprises a metal roll core.

20 11. The covered roll of claim 3, wherein the void space of said compressive layer is filled with an epoxy resin cured at a temperature lower than temperature at which the cover is cured.

25 12. The covered roll of claim 5, wherein the void space of said compressive layer is filled with an epoxy resin cured at a temperature lower than temperature at which the cover is cured.

13. The covered roll of claim 7, wherein the void space of said compressive layer is filled with an epoxy resin cured at a temperature lower than temperature at which the cover is cured.

- 5 14. The covered roll of claim 8, wherein the void space of said compressive layer is filled with an epoxy resin cured at a temperature lower than temperature at which the cover is cured.

15. A covered roll comprising:

a roll core base;

a filling member having at least one surface which defines
a filling region, said filling member circumferentially
5 surrounding said roll core base;

a cover circumferentially surrounding said filling member;

wherein said filling region comprises a material cured at
a temperature lower than temperature at which the cover is cured.

10 16. A covered roll comprising:

a roll core base;

a filling member having a top surface and a bottom surface
which top and bottom surfaces define a filling region, said
filling member circumferentially surrounding said roll core base;

15 a cover circumferentially surrounding said filling member;

wherein said filling region comprises a material cured at
a temperature lower than temperature at which the cover is cured.

17. The covered roll of claim 12, wherein said cover comprises
20 an epoxy resin having a shore-D hardness greater than 84.

18. The covered roll of claim 13, wherein said cover is an epoxy
resin which is cured at a temperature greater than 100°C.

25 19. The covered roll of claim 12, wherein said cover is formed
of a material which is cured at a temperature greater than 100°C.

20. The covered roll of claim 15, wherein said cover is an epoxy resin which is cured at a temperature greater than 100°C.

5 21. The covered roll of claim 12, wherein the roll core base comprises a metal roll core.

22. The covered roll of claim 14, wherein the roll core base comprises a metal roll core.

10 23. The covered roll of claim 15, wherein said filling member comprises a fabric having a fibrous top surface and a fibrous bottom surface, said top and bottom surfaces being structurally supported by fibers extending from said top surface to said bottom surface.

15 24. The covered roll of claim 1, wherein said filling member comprises a sheet having a single surface and a plurality of projections, said projections extending from said surface to define a substantially planar boundary.

20

25. In a process for covering a roll in which a relatively hard covering material is applied over the roll core base wherein the improvement comprises spacing the cover from the roll core base to provide a circumferential gap intermediate between the core and the cover and filling the gap between the core and the cover after the cover has been applied over the core.

26. The process of claim 19 wherein the gap is formed by a spacing material.

27. The process of claim 19 wherein the gap is filled with the spacer material in place.

28. The process of claim 21 wherein the filling material is polymer.

29. The process of claim 19 wherein the cover is applied to the compressive layer as a resin impregnated tape as the roll is rotated.

30. A method of making a covered roll, said method comprising the steps of:

applying a compressive layer over a roll core base, the compressive layer having a top surface and a bottom surface and
5 a void space therebetween, the compressive layer being compressible enough to change in volume as a result of the stresses created during processing;

applying a cover material over the compressive layer to form a covered roll;

10 heat treating the roll to cure the cover material under such conditions which allow the void space in the compressive layer to absorb the stresses.

31. A method of making a covered roll, said method comprising
15 the steps of:

applying a compressive layer over a roll core base, the compressive layer having a top surface and a bottom surface and
a void space therebetween, said compressive layer being compressible enough to change in volume as a result of the
20 stresses created during processing;

applying a cover material over the compressive layer to form a covered roll;

heat treating the roll to cure the cover material under such conditions which allow the void space in the compressive layer
25 to absorb the stresses;

and,

filling the remaining void spaces of the compressive layer

with a material to create a solid roll.

32. The method of making a covered roll of claim 31, further comprising the step of curing the filler material at a lower temperature than the cure temperature of the covering material so as to create a solid roll.

33. The method of making a covered roll of claim 31, wherein prior to said step of applying the compressive layer to the roll core base, said method comprises the additional steps of:

locating an extender cap assembly on each end of the roll core base, said assembly comprising a substantially circular plate and a cylindrical section having an outer circumference substantially the same as the outer circumference of the roll core base;

and after said steps of applying and curing said coating material, the additional steps of,

drilling holes into the roll which extend through the cured coating material and into the compressive layer;

sealing both roll ends with a gasket;

injecting a filler material through the holes and into the compressive layer;

curing the filler material at a lower temperature than the cure temperature of the covering material so as to create a solid roll; and,

severing the outer ends of the finished roll so as to remove the extender assemblies.

34. The method of making a covered roll of claim 31, wherein said step of drilling further includes inserting valves into the holes.

5 35. The method of making a covered roll of claim 31, wherein said step of injecting further includes tilting the roll at an angle with respect to the horizontal.

10 36. The method of making a covered roll of claim 31, wherein said step of applying a cover material further comprises, impregnating a non-woven cloth with resin, and applying the impregnated cloth to the compressive layer.

15 37. The method of making a covered roll of claim 31, wherein prior to said step of applying the cover material to the compressive layer, said method comprises the additional step of applying a coating layer to said compressive layer, said coating layer being impervious to resin materials.

20 38. The method of making a covered roll of claim 31, said applying step further comprising the step of wrapping a non-woven tape impregnated with resin around the compressive layer.

39. A method of making a covered roll comprising the steps of:
applying one or more compressive layers to a roll core base;
coating the outer surface of the compressive layer with an
ingredient which renders said layer impervious to polymer forming
5 materials;

applying a polymer coating material to the now impervious
compressive layer to form a covered roll; and,
heat treating the covered roll to cure the polymer;
said compressive layer being allowed to change in volume
10 as a result of the stresses exerted during processing.

40. The method of making a covered roll according to claim 39,
further comprising the steps of: predetermining the amount of
shrinkage that will occur during the manufacture of the roll, and
15 applying enough compressive layers so that as the stresses
exerted during processing change the volume of the roll, said
compressive layers have such a depth so as to absorb said amount
of shrinkage.

41. A method of making a covered roll comprising the steps of:
20 applying a compressive layer to a roll core base so as to
circumferentially surround said roll core, said compressive layer
comprising a removable material and being compressible enough to
change in volume as a result of the stresses created during
25 processing while also being rigid enough to support a coating
material;

applying a coating material to the compressive layer;

heat treating the roll to cure said coating material;
removing the removable material; and,
filling the resulting gap layer with a material to create
a solid roll.

5

42. The method of making a covered roll according to claim 41,
wherein said removable material has a melting point less than the
cure temperature of the cover material, and wherein after said
applying step, said method further comprising the step of
10 removing the material by melting during the cure period of the
coating material so as to create a circumferential gap layer.

43. The method of making a covered roll according to claim 41
wherein said gap layer is filled with an epoxy resin.

15

44. The method of making a covered roll according to claim 41
wherein said filling step further comprises filling the gap layer
with a filler material selected from the group consisting of a
thermoplastic, a thermoset, an epoxy resin and an elastomer.

20

45. The method of making a covered roll according to claim 41,
further comprising the step of curing the filler material at a
lower temperature than the cure temperature of the cover.

25

46. A method of making a covered roll comprising the steps of:
predetermining the amount of shrinkage that will occur
during production of said roll;

applying a compressive layer over a mandrel base, said compressive layer having a sufficient depth to absorb the volume changes from subsequent layers allow for shrinkage;

5 applying a coating material to said compressive layer to form a cylinder;

heat treating the cylinder to cure the cylinder material into a solid cover, said compressive layer being allowed to change in volume as a result of the stresses created during processing;

10 removing the mandrel so as to create a tube.

applying said tube over a roll core base;

and,

filling the gap between said roll core base and said tube to create a solid roll.

15

47. A process for making a cylindrical tube for later use as a roll cover, said process comprising:

predetermining the amount of shrinkage that will occur during production of said roll;

20 applying a compressive layer over a mandrel base, said compressive layer having a sufficient depth to absorb the volume changes from subsequent layers allow for shrinkage;

applying a coating material to said compressive layer to form a cylinder;

25

heat treating the cylinder to cure the cylinder material into a solid cover, said compressive layer being allowed to change in volume as a result of the stresses created during

processing;

and,

removing the mandrel so as to create a tube.

5 48. A covered roll comprising:

a roll core base;

a compressive layer circumferentially surrounding said roll
core base, said compressive layer comprising a removable material
that is removable by melting;

10 a covering material circumferentially surrounding said
compressive layer;

said compressive layer also being compressible enough to
change in volume as a result of the stresses created during
processing, and rigid enough to support the cover material.

15

AMENDED CLAIMS

[received by the International bureau on 5 July 1996 (05.07.96);
original claims 1-48 replaced by amended claims 1-29 (6 pages)]

1. A covered roll comprising:

5 a roll core base;

a compressive layer having a top surface and a bottom
surface and a void space therebetween, said compressive layer
circumferentially surrounding said roll core base;

10 a cover circumferentially surrounding said compressive
layer;

said compressive layer being rigid enough to support said
surrounding cover and compressible enough to change in volume in
response to the volume changes which occur in said cover as a
result of the stresses created during processing.

15 2. The covered roll of claim 1, wherein said cover comprises
an epoxy resin having a Shore-D hardness greater than 84.

20 3. The covered roll of claim 2, wherein said cover is an epoxy
resin which is cured at a temperature greater than 100°C.

4. The covered roll of claim 1, wherein said cover is formed
of a material which is cured at a temperature greater than 100°C.

25 5. The covered roll of claim 4, wherein said cover is an epoxy
resin which is cured at a temperature greater than 100°C.

6. The covered roll of claim 2, wherein the void space of said

compressive layer is filled with an epoxy resin cured at a temperature lower than a temperature for which the cover is cured.

5 7. The covered roll of claim 1, wherein said compressive layer comprises a fabric having a fibrous top surface and a fibrous bottom surface, said top and bottom surfaces being structurally supported by fibers extending from said top surface to said bottom surface.

10

8. The covered roll of claim 1, wherein said compressive layer comprises a sheet having a single surface and a plurality of projections, said projections extending from said surface to define a substantially planar boundary.

15

9. The covered roll of claim 1, wherein the roll core base comprises a metal roll core.

20

10. The covered roll of claim 3, wherein the roll core base comprises a metal roll core.

25

11. The covered roll of claim 3, wherein the void space of said compressive layer is filled with an epoxy resin cured at a temperature lower than a temperature for which the cover is cured.

12. The covered roll of claim 5, wherein the void space of said compressive layer is filled with an epoxy resin cured at a

temperature lower than a temperature for which the cover is cured.

13. The covered roll of claim 7, wherein the void space of said
5 compressive layer is filled with an epoxy resin cured at a
temperature lower than a temperature for which the cover is
cured.

14. The covered roll of claim 8, wherein the void space of said
10 compressive layer is filled with an epoxy resin cured at a
temperature lower than a temperature for which the cover is
cured.

15. A covered roll comprising:

a roll core base;

a filling member having at least one surface which defines
a filling region, said filling member circumferentially
5 surrounding said roll core base;

a cover circumferentially surrounding said filling member;

wherein said filling region comprises a material cured at
a temperature lower than a temperature for which the cover is
cured.

10

16. A covered roll comprising:

a roll core base;

a filling member having a top surface and a bottom surface
which top and bottom surfaces define a filling region, said
15 filling member circumferentially surrounding said roll core base;

a cover circumferentially surrounding said filling member;

wherein said filling region comprises a material cured at
a temperature lower than a temperature for which the cover is
cured.

20

17. The covered roll of claim 16, wherein said cover comprises
an epoxy resin having a shore-D hardness greater than 84.

18. The covered roll of claim 17, wherein said cover is an epoxy
25 resin which is cured at a temperature greater than 100°C.

19. The covered roll of claim 16, wherein said cover is formed
of a material which is cured at a temperature greater than 100°C.

20. The covered roll of claim 19, wherein said cover is an epoxy resin which is cured at a temperature greater than 100°C.

21. The covered roll of claim 16, wherein the roll core base comprises a metal roll core.

22. The covered roll of claim 18, wherein the roll core base comprises a metal roll core.

23. The covered roll of claim 16, wherein said filling member comprises a fabric having a fibrous top surface and a fibrous bottom surface, said top and bottom surfaces being structurally supported by fibers extending from said top surface to said bottom surface.

24. The covered roll of claim 16, wherein said filling member comprises a sheet having a single surface and a plurality of projections, said projections extending from said surface to define a substantially planar boundary.

25. In a process for covering a roll in which a relatively hard covering material is applied over the roll core base wherein the improvement comprises spacing the cover from the roll core base to provide a circumferential gap intermediate between the core and the cover and filling the gap between the core and the cover after the cover has been applied over the core.

26. The process of claim 25 wherein the gap is formed by a spacing material.

27. The process of claim 25 wherein the gap is filled with the spacer material in place.

28. The process of claim 27 wherein the filling material is polymer.

29. The process of claim 25 wherein the cover is applied to the compressive layer as a resin impregnated tape as the roll is rotated.

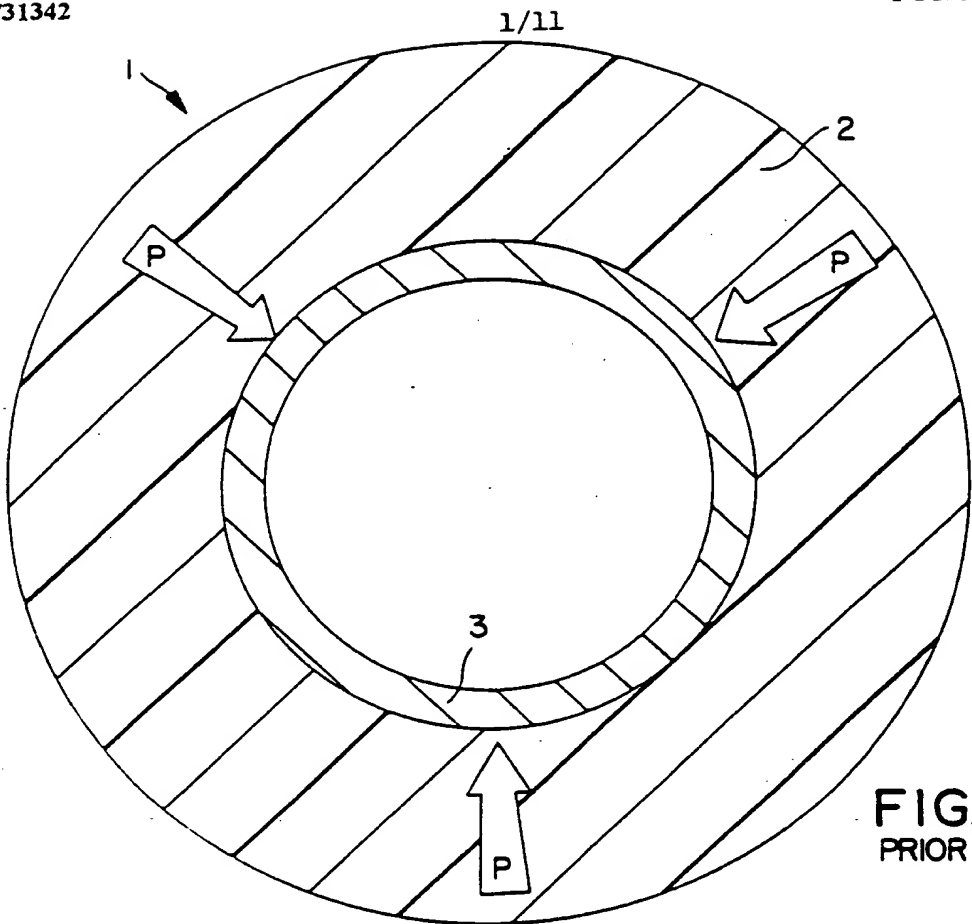


FIG. 1
PRIOR ART

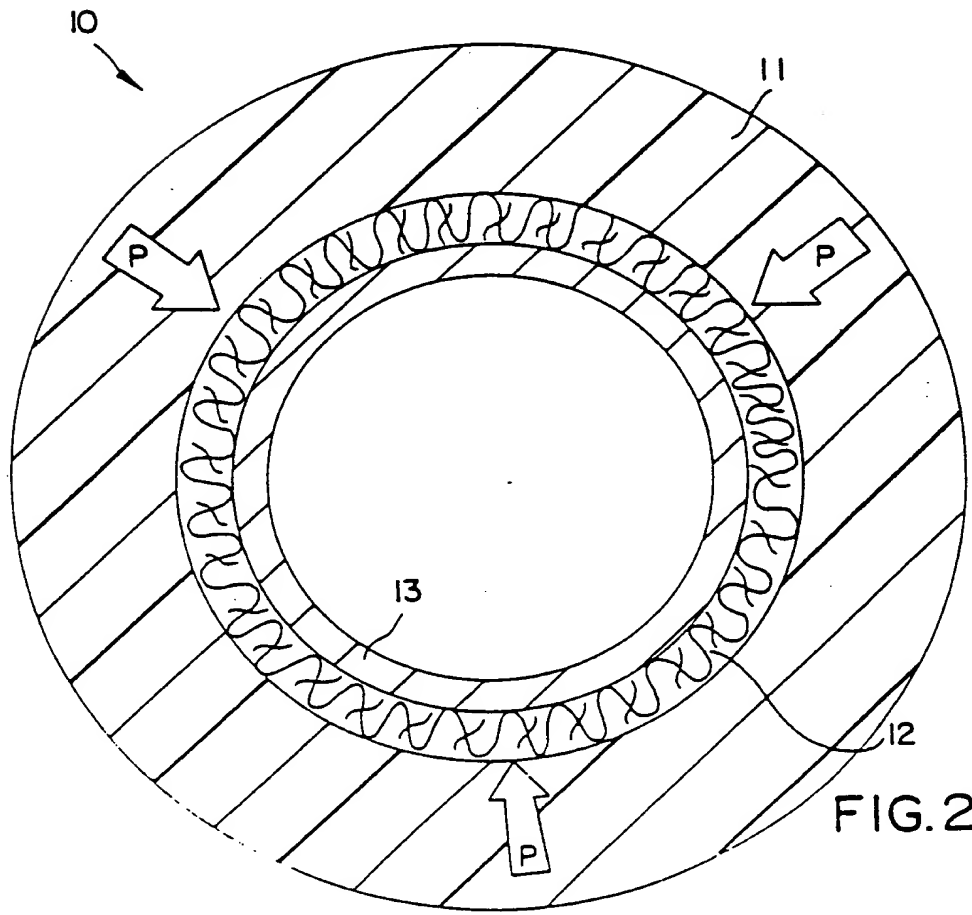


FIG. 2

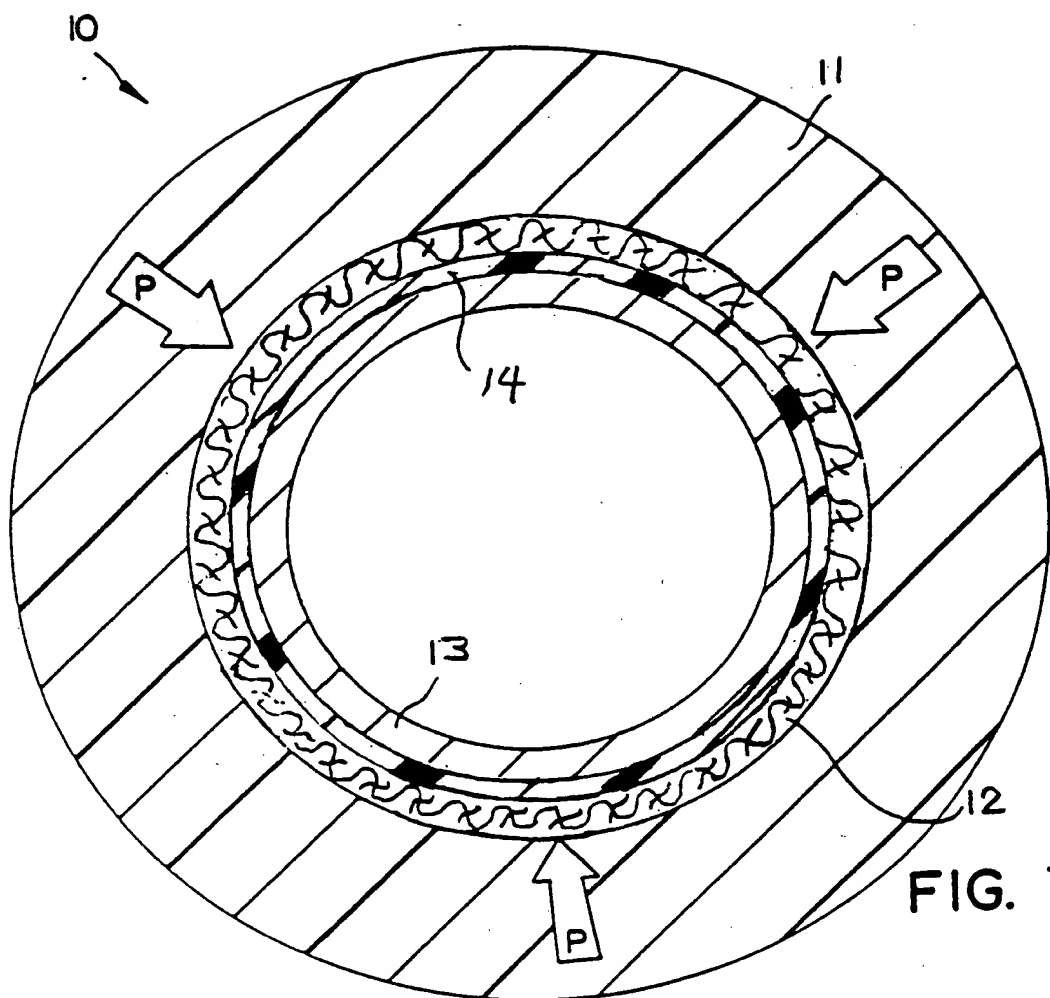
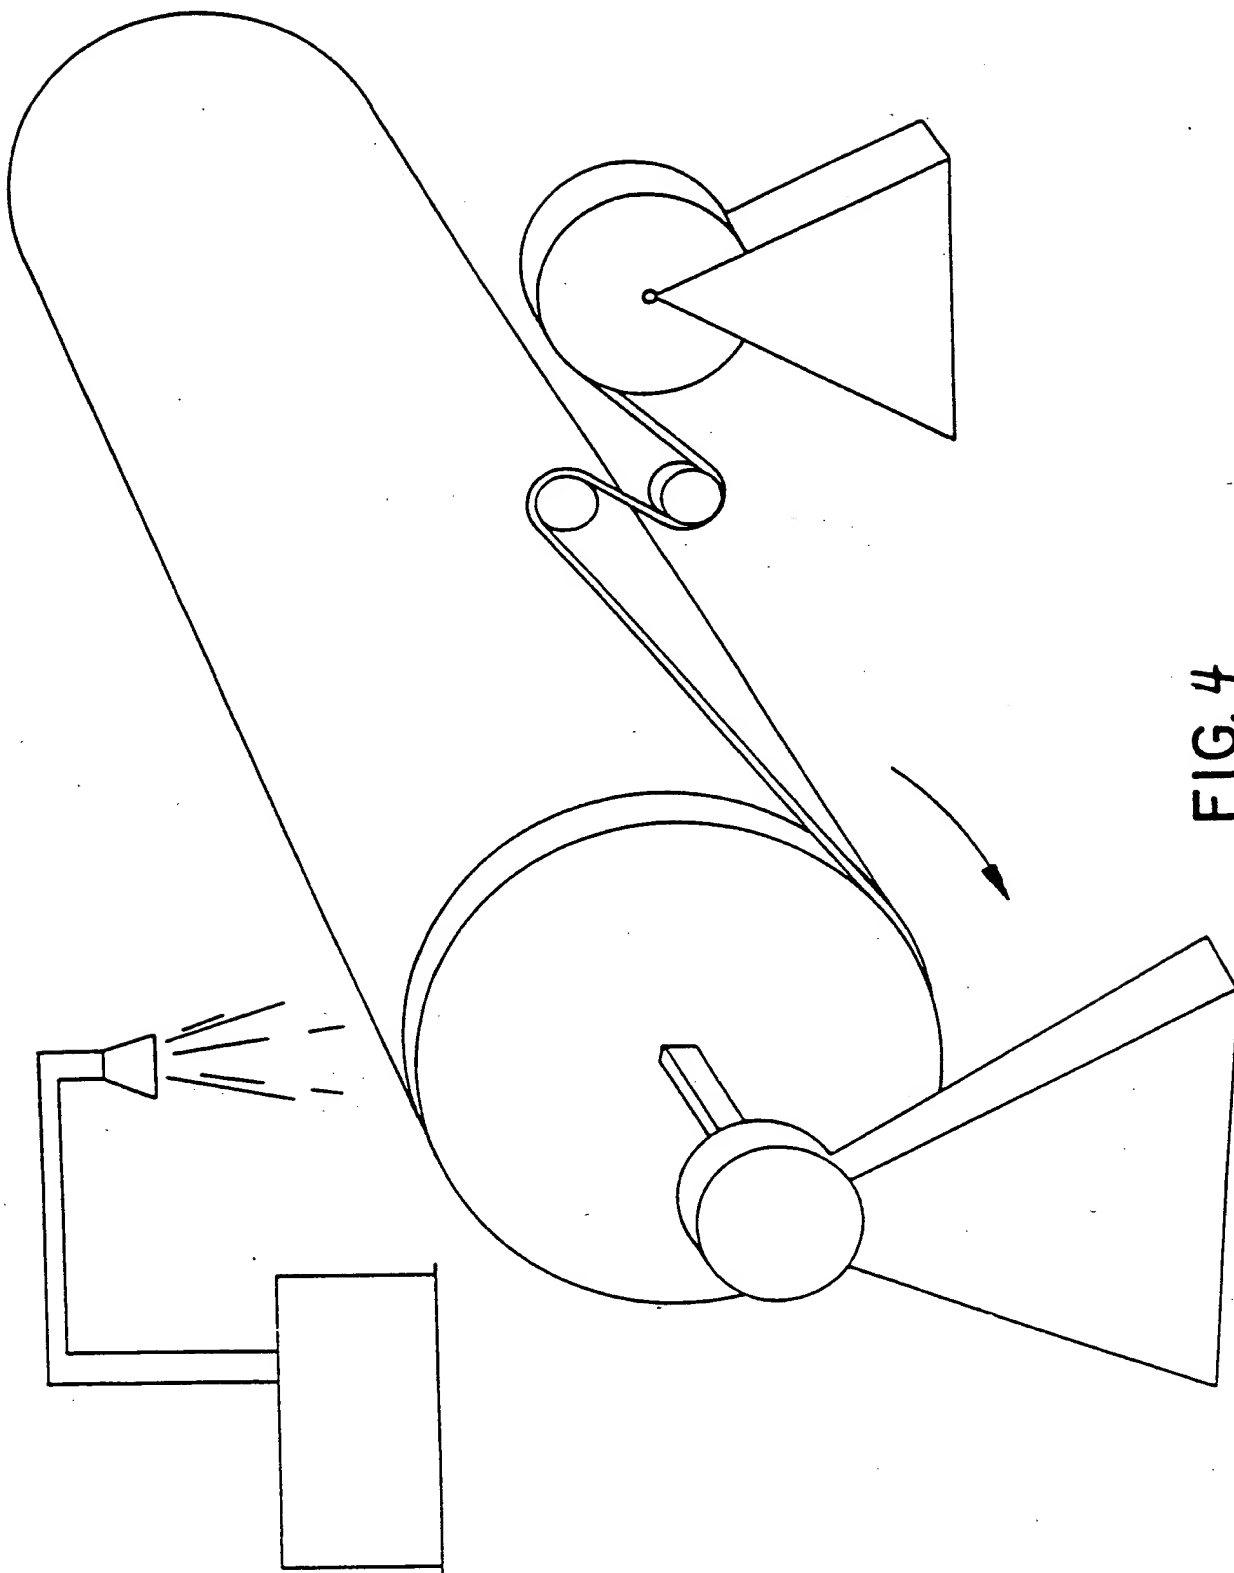


FIG. 3



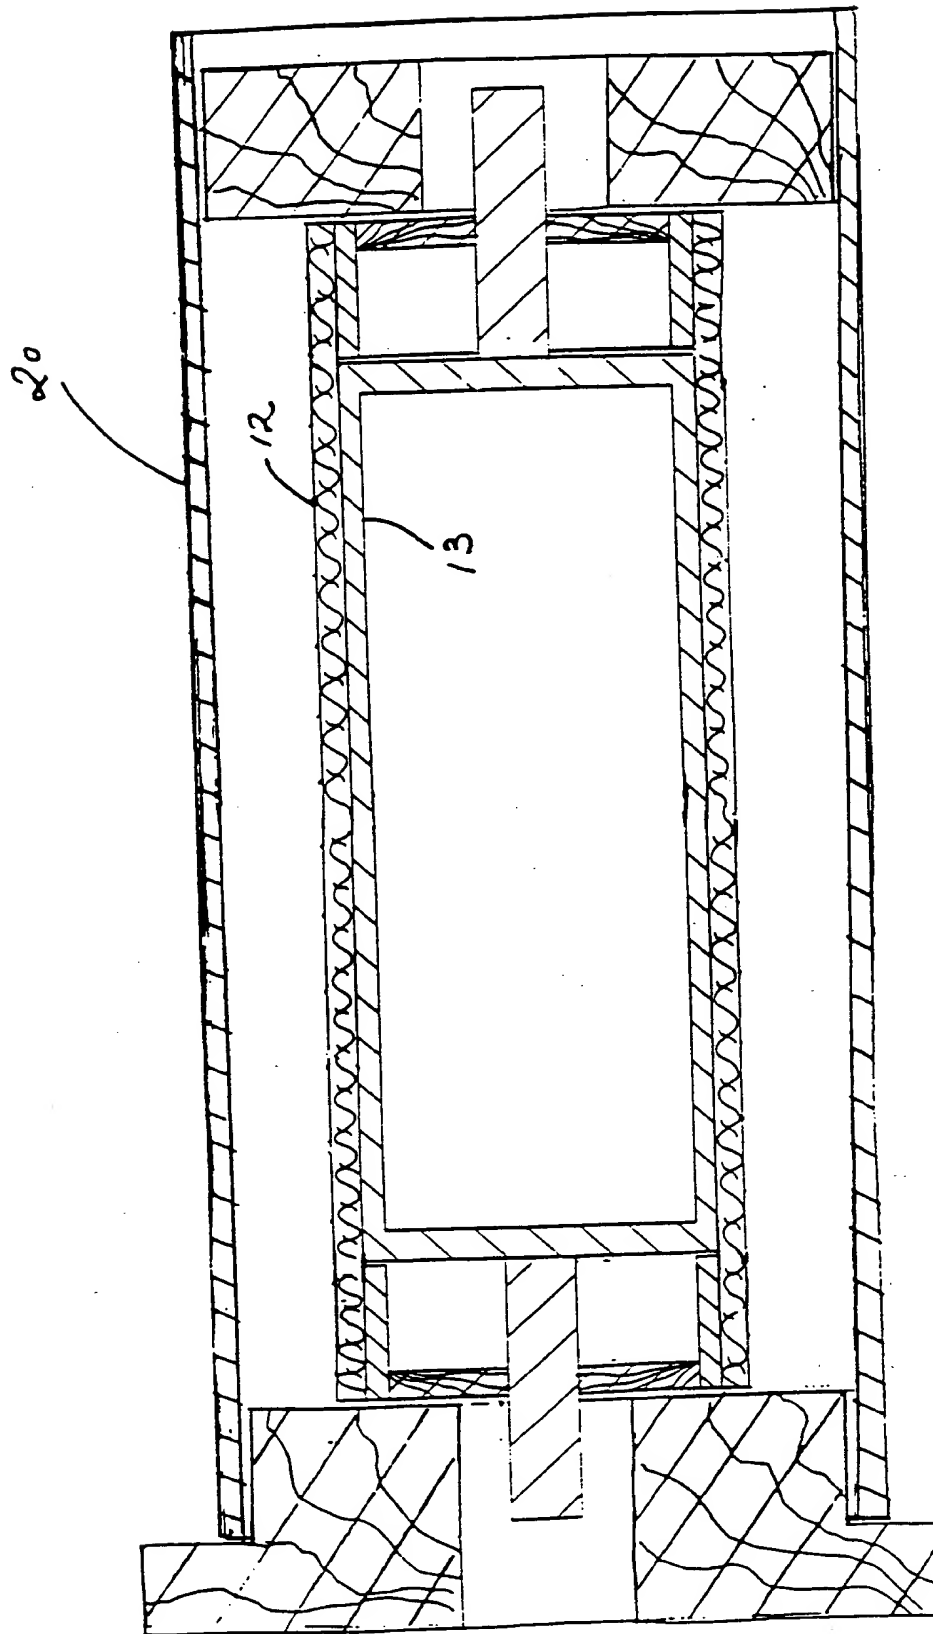


FIG. 5

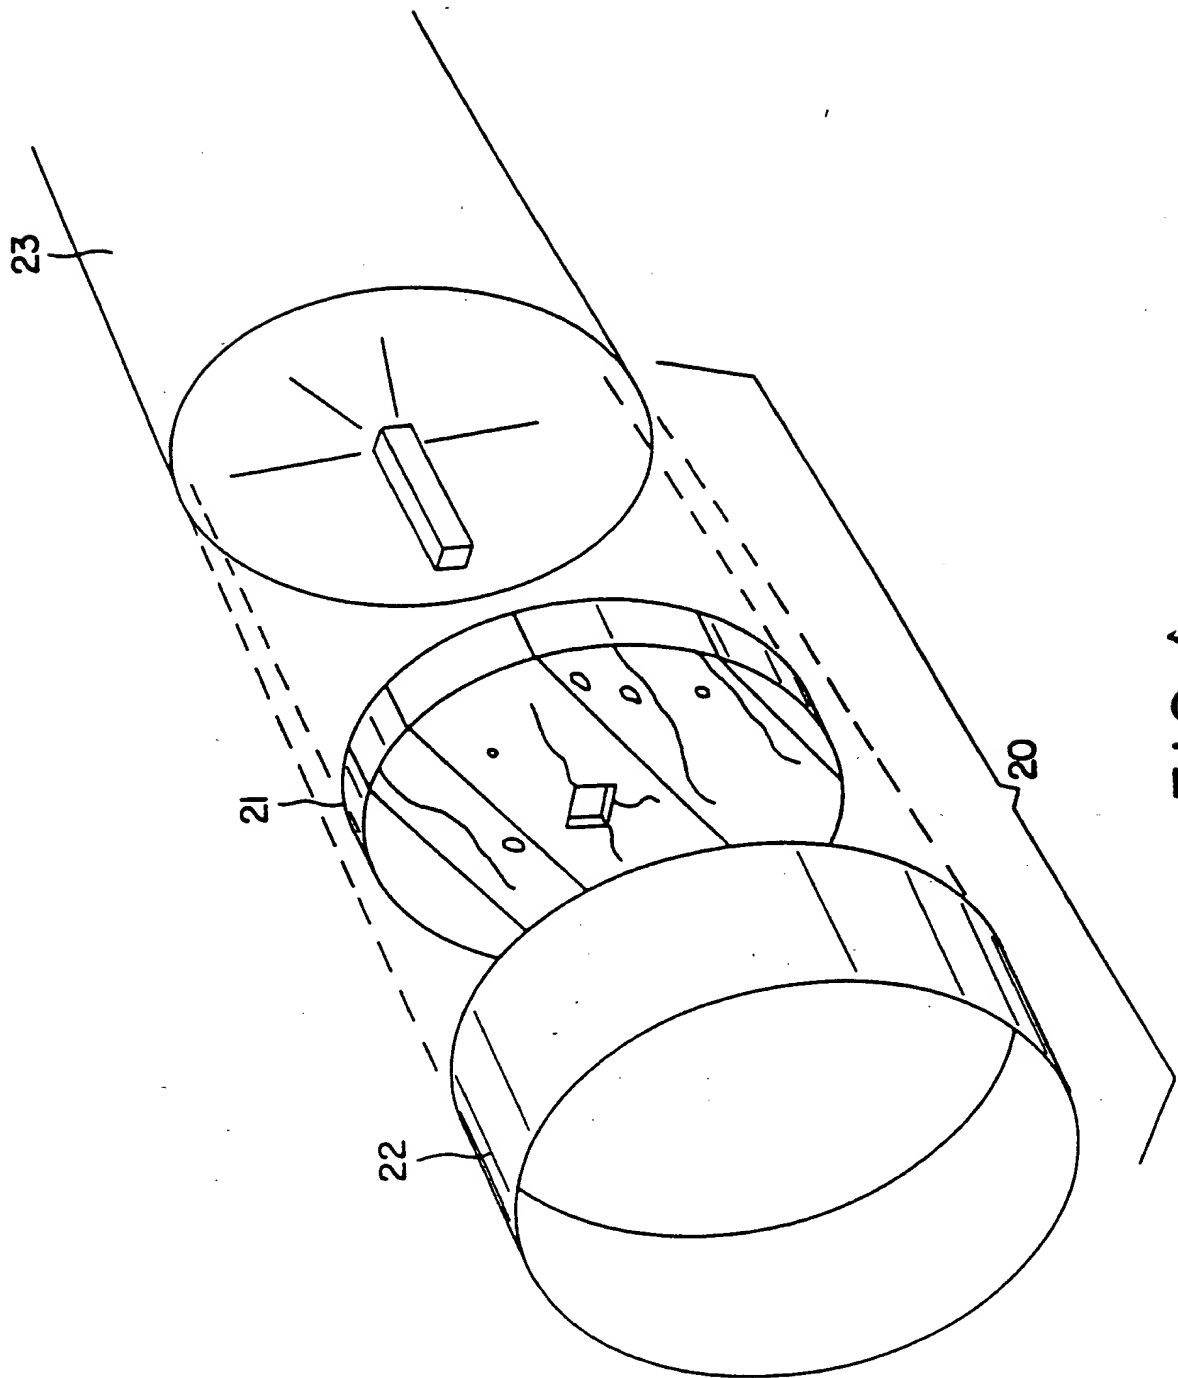
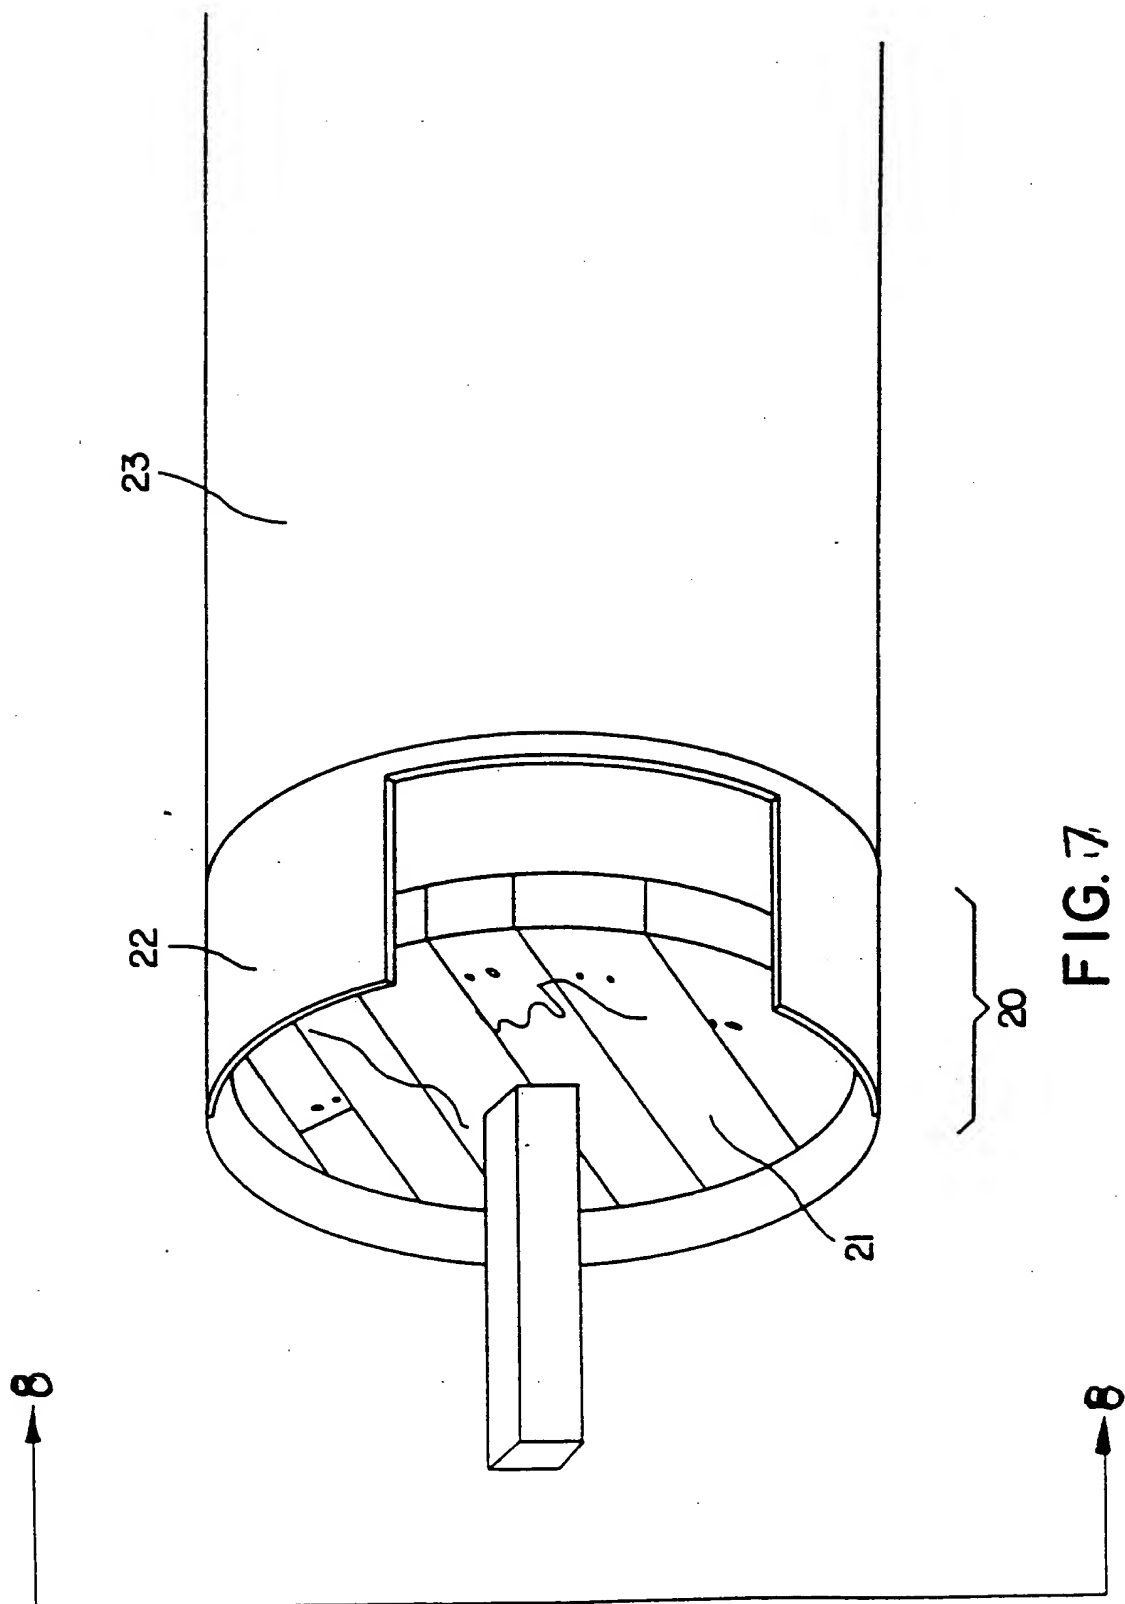


FIG. 6



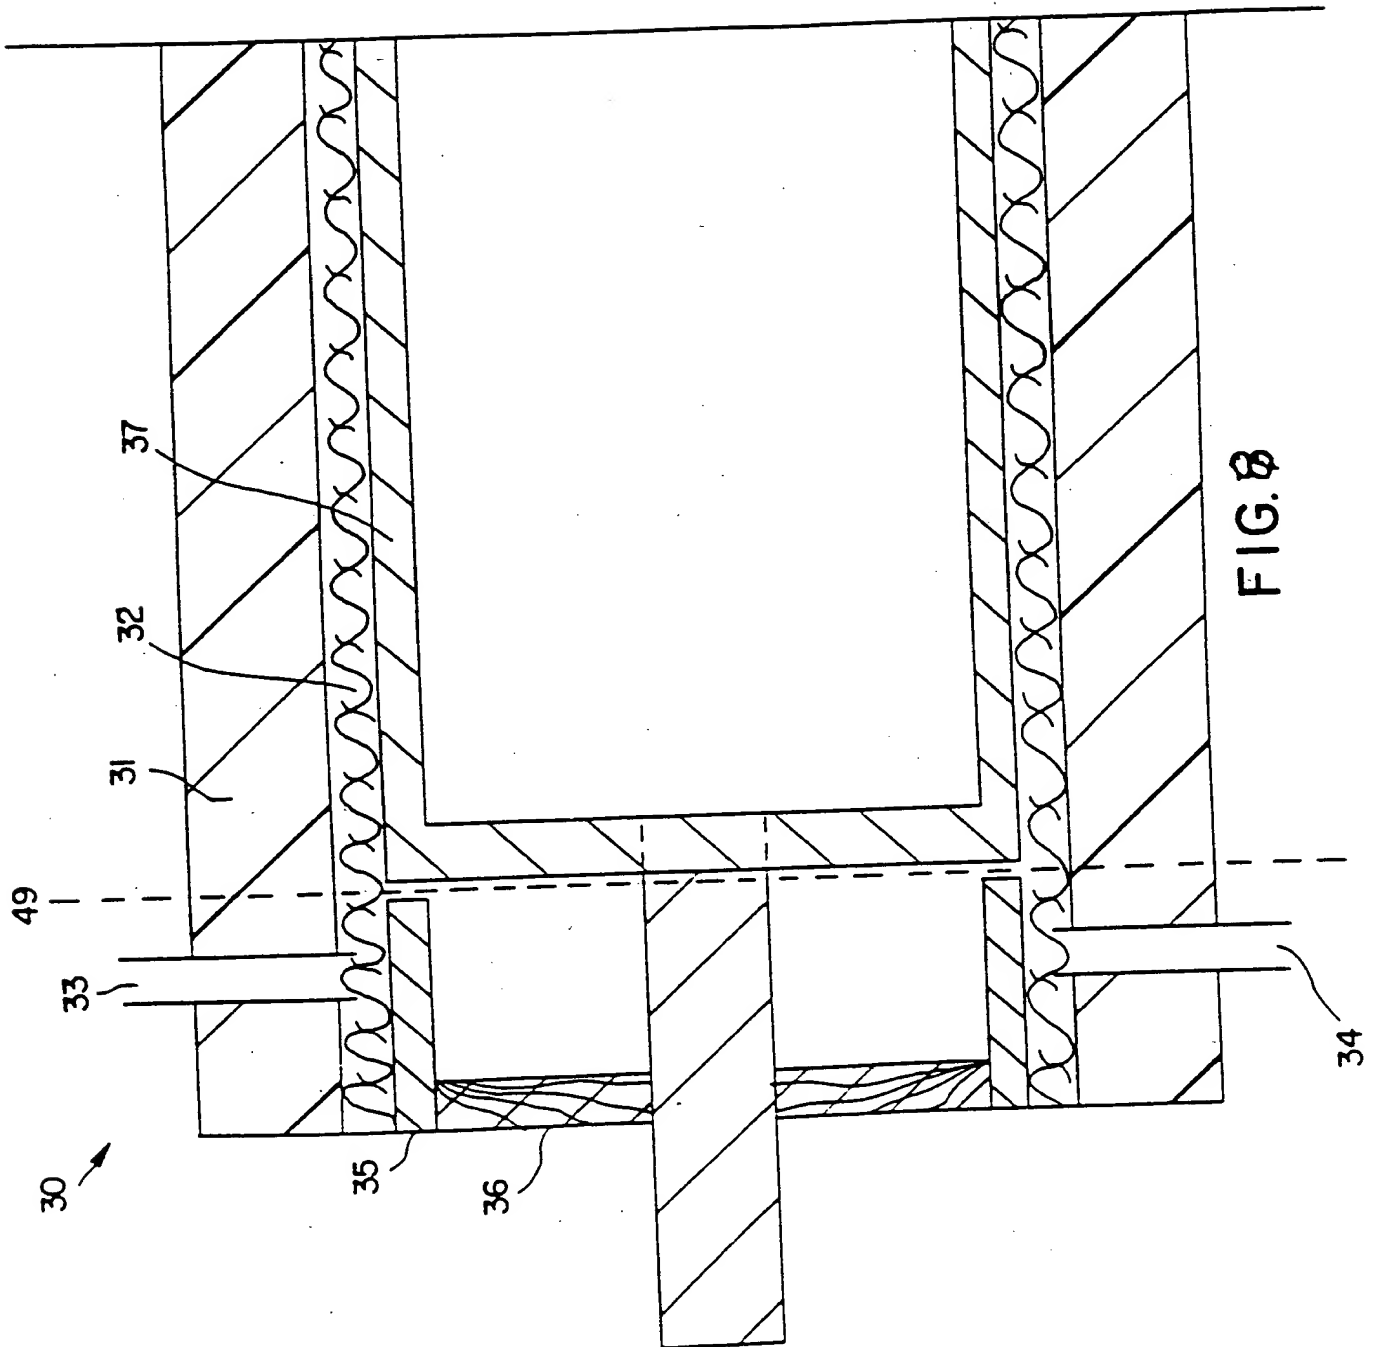
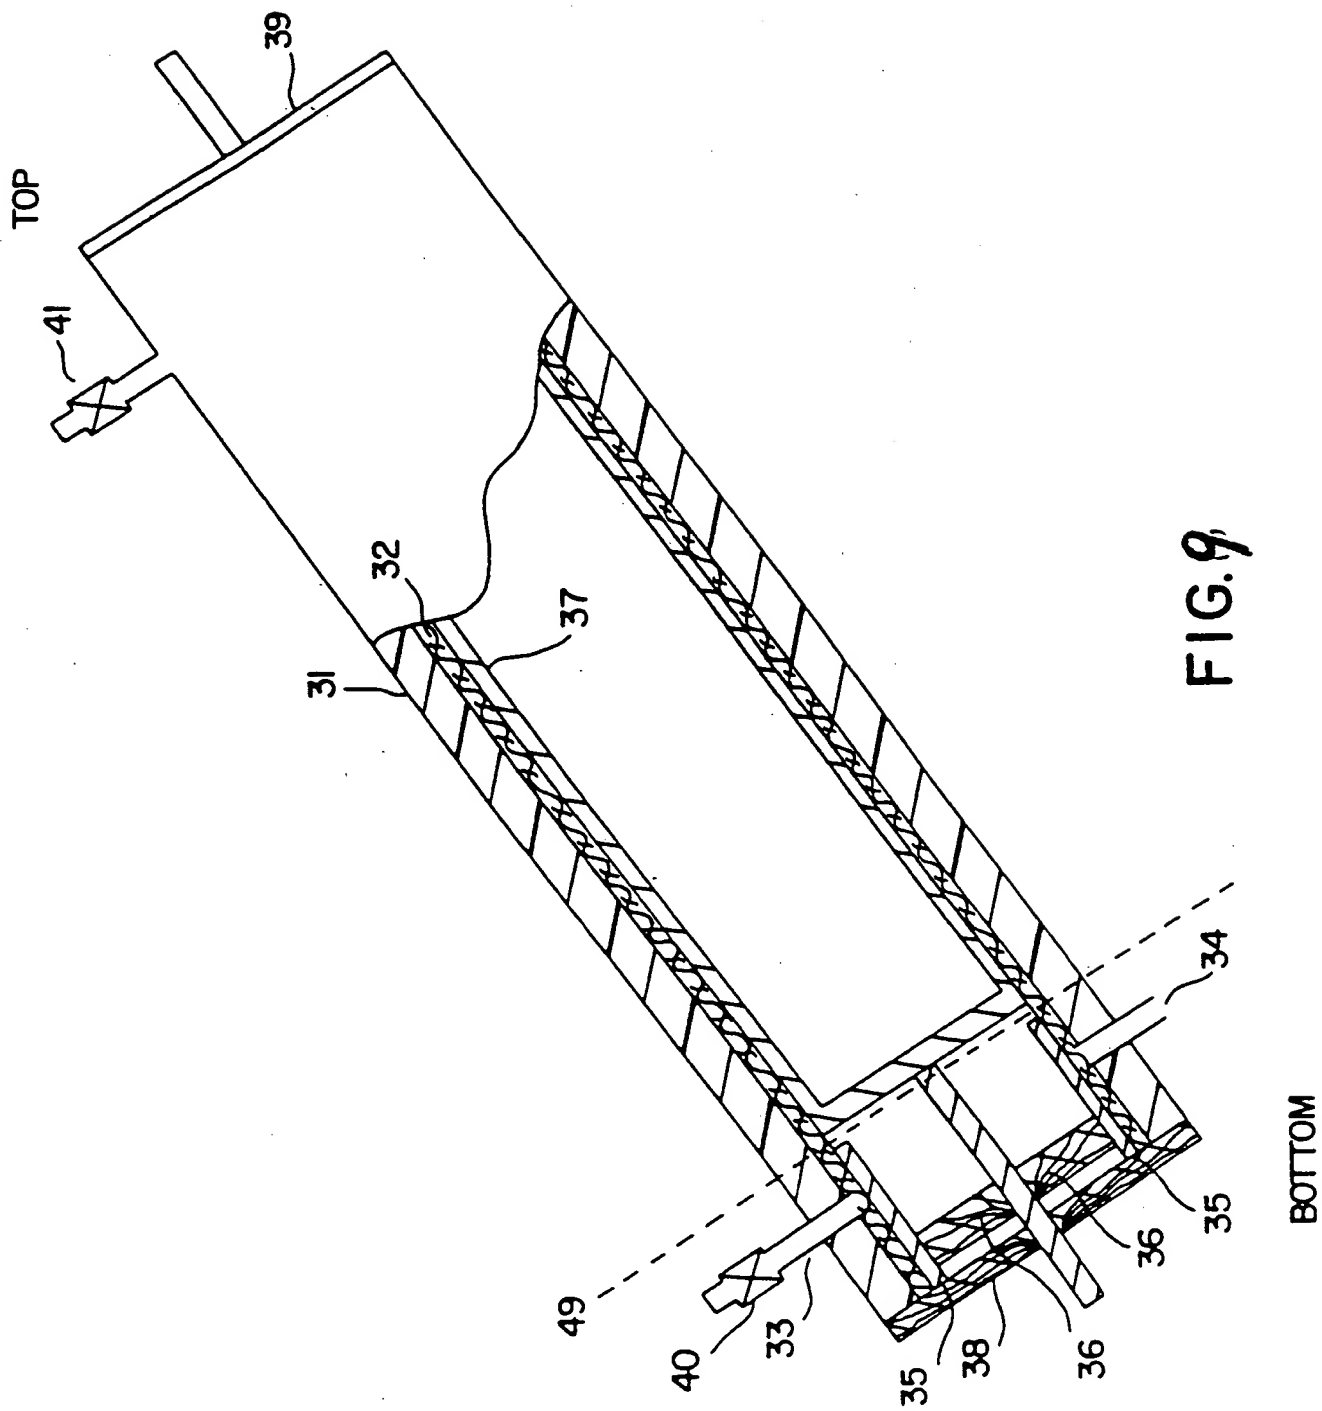


FIG. 8



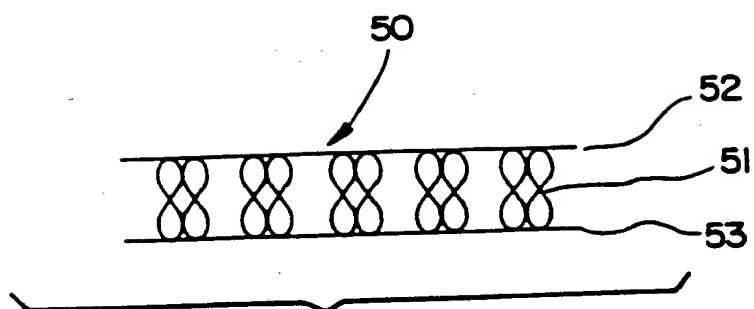


FIG. 10

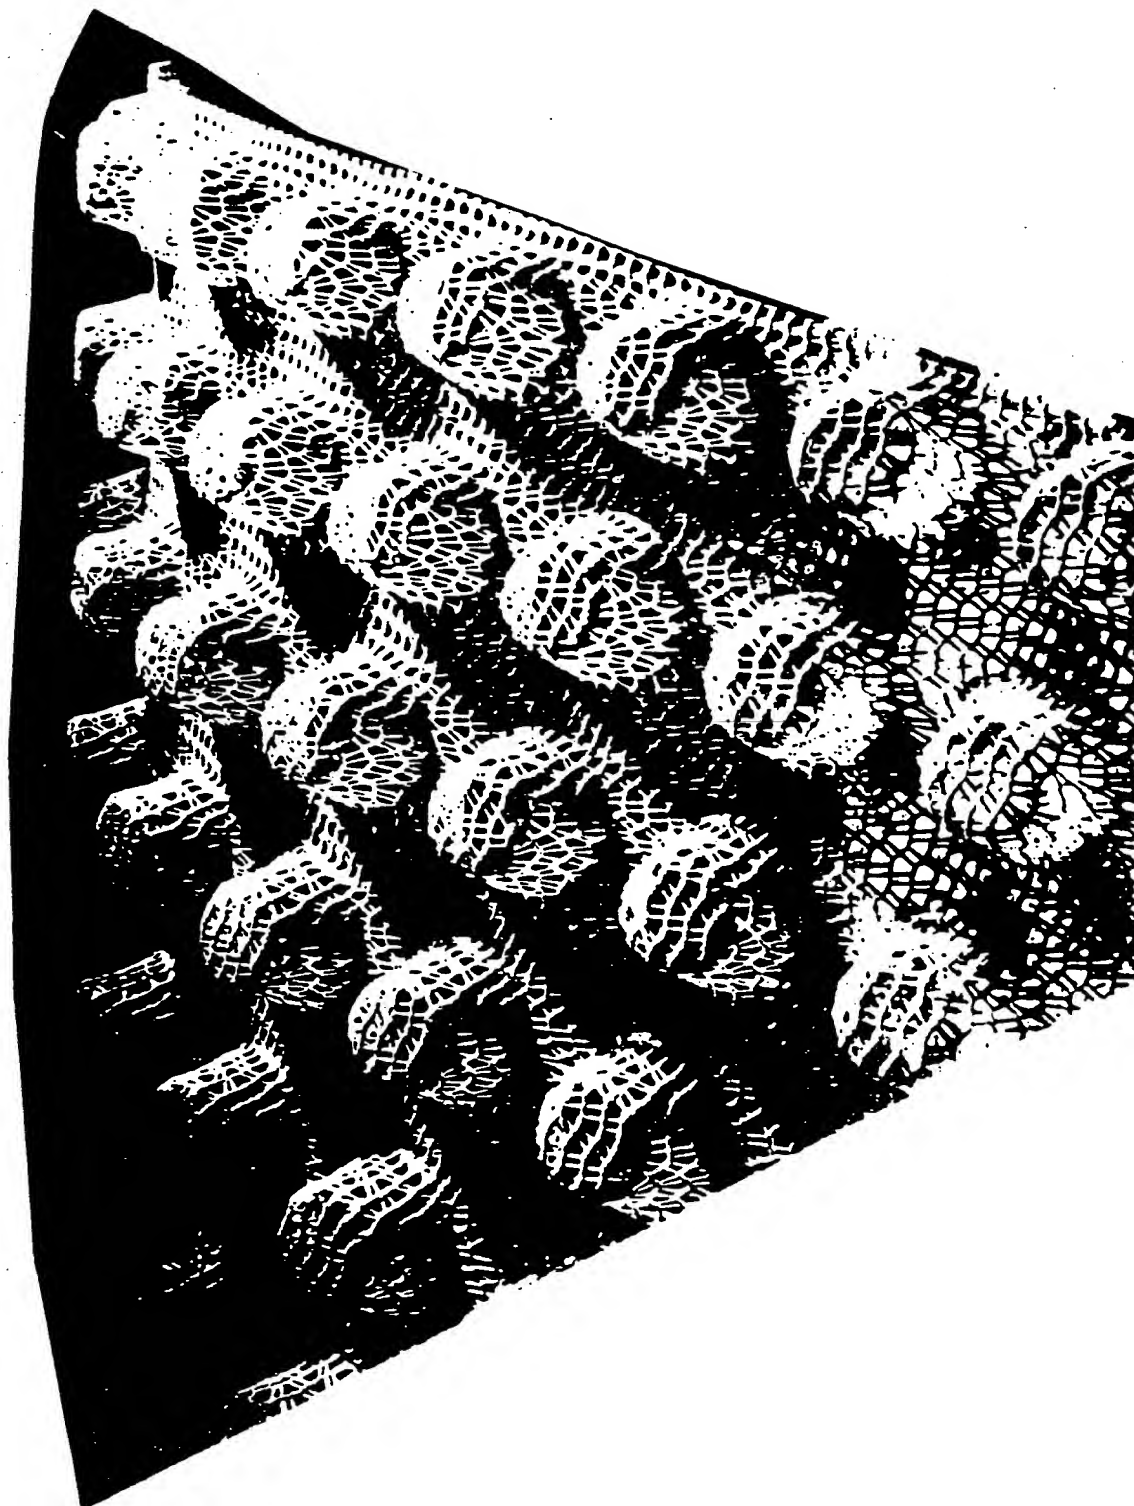


FIG. 11

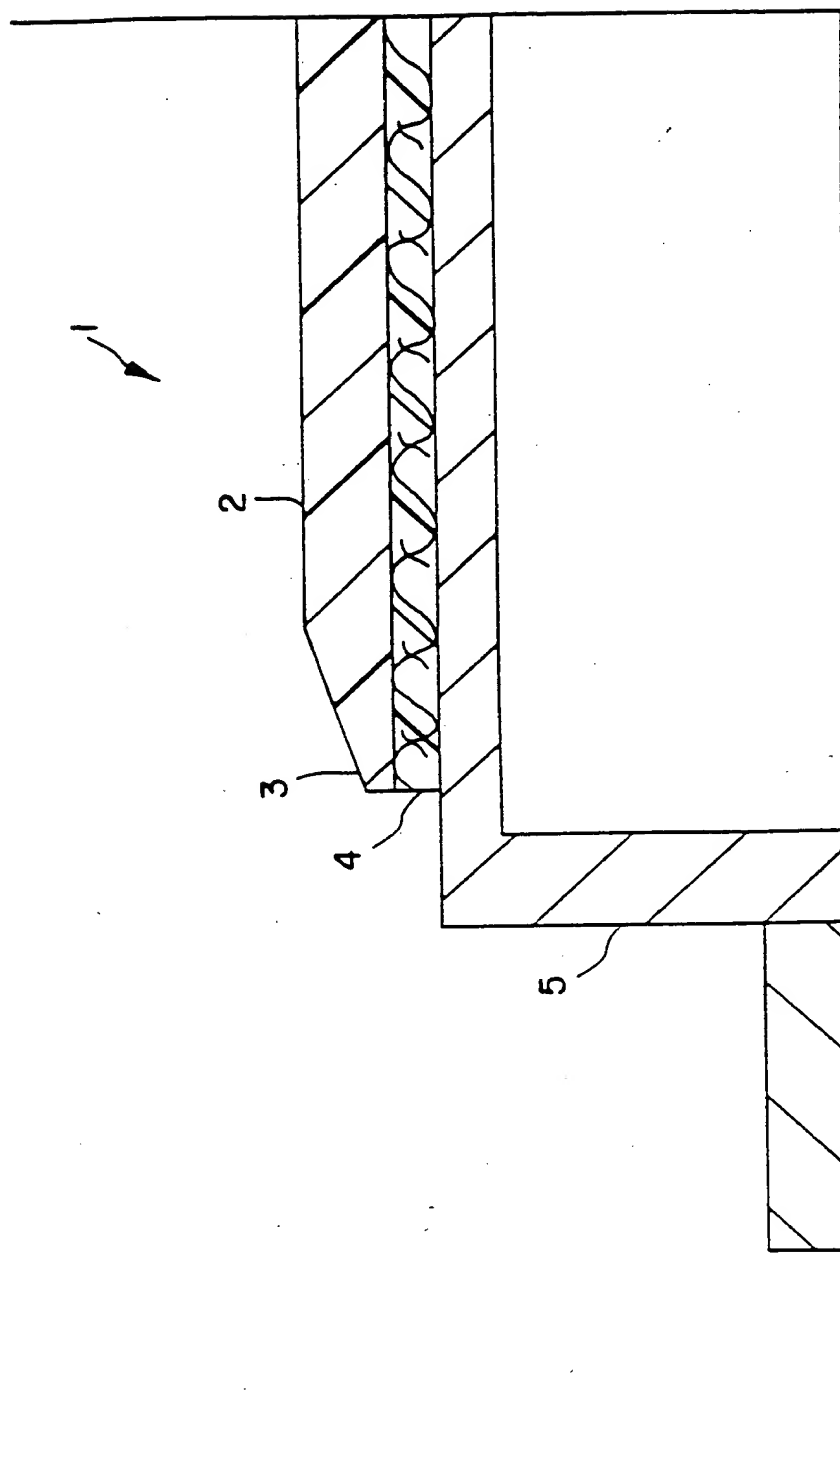


FIG.12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/04668

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :B32B 3/02

US CL :428/76

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 428/76, 372, 375, 377, 383, 389, 390, 401, 462, 463

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,368,568 (WATANABE) 18 January 1983, see entire document.	1-48
Y	US, A, 4,288,058 (INMAN) 08 September 1981, see entire document.	1-48

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

23 MAY 1996

Date of mailing of the international search report

06 JUN 1996

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ELIZABETH EVANS

Telephone No. (703) 308-2351